



Product Specification Sheet

Aurora Cyc



A range of asymmetric floods 1.0kW / 1.25kW to light the cyc or back-cloth with a visually even wash of light from a top mounting position.

Designed to light cloths up to 10m high from a throw distance of 2-3m.

Features

Light beam is very smooth and falls off evenly without visible high lights or shadows.

The extruded aluminium reflector guarantees repeatability of beam characteristics.

Robust construction from a combination of aluminium extrusions and formed steel panels.

Filter life is maximised by the dual air-flow chamber construction.

Filter frame size ensures an economic two frame cut out of a standard filter sheet.

The filter frame is flat ensuring it can be mounted into the luminaire with ease.

Re-lamp without removing the colour filter holder via the hinged front filter holder assembly.

Available in a variety of configurations with your choice of multi connector options.

Lamps: 220V -240V

P2/12 1250W
33,750 lumens 200 hours average life

P2/7 1000W
26,000 lumens 200 hours average life

P2/10 625W
16,250 lumens 200 hours average life

Order Codes

10AUCYC1
Aurora Cyc

10AUCYC1PO
Aurora Cyc with pole operation

10AUCYC4S
Aurora 4-way Square Cyc

10AUCYC4SPO
Aurora 4-way Square Cyc with pole operation

10AUCYC4L
Aurora 4-way Linear Cyc (tails out)

10AUCYC4LW
Aurora 4-way Linear Cyc (Wieland)

10AUCYC4LS
Aurora 4-way Linear Cyc (Socapex)

20BDAU
Aurora Barndoor

20HC
Suspension Hookclamp

20SC
Safety Bond


Approvals

Compliant to CE standards.




Photometric Data

Tests conducted using a standard 1250W, 240V, 189mm P2/12 lamp.

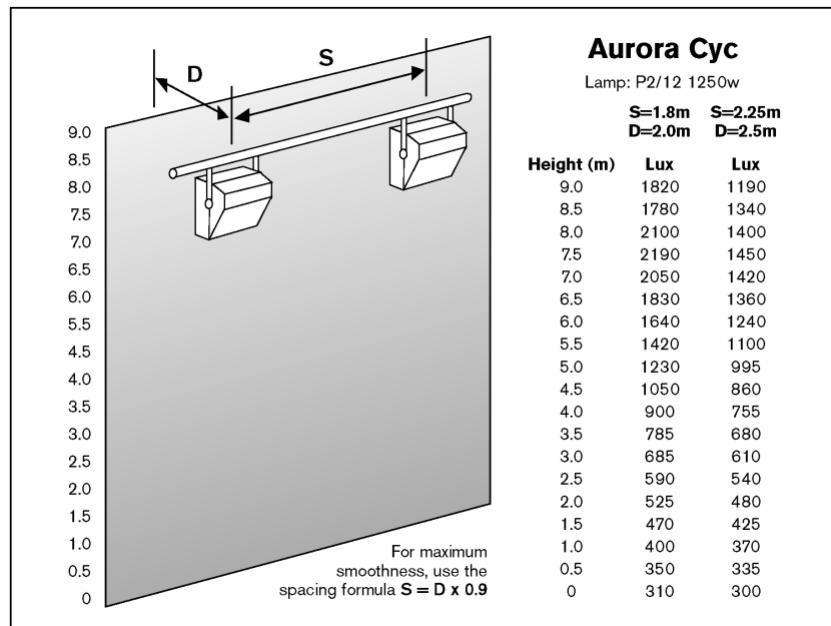

Physical Data

	Single	4-way Linear	4-way Square
Packed weight:	9.1kg	30kg	33kg
Colour frame size:	305mm x 315mm		
Included:	1x colour frame for single, 4x colour frames for 4-way, 1 x M12 nut & bolt set, instruction leaflet.		

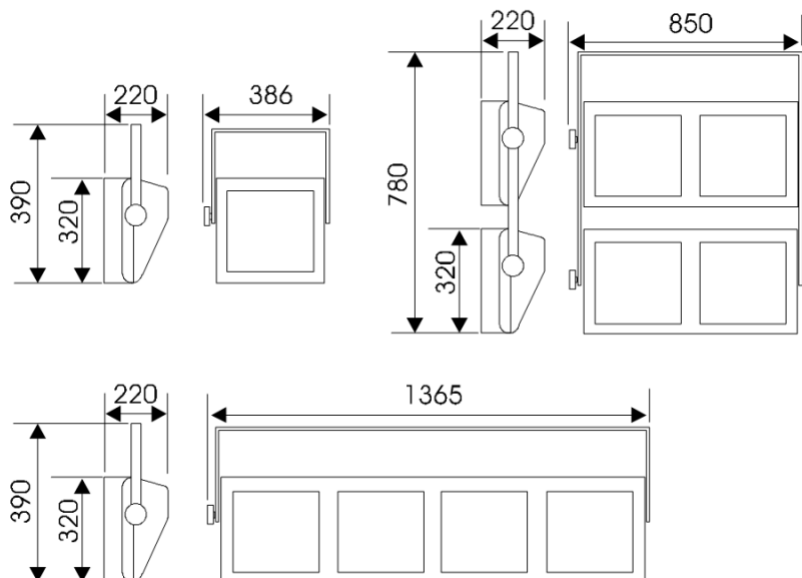

Selecon reserves the right to change the specifications without notice (06/08).