



Product Specification Sheet

Pacific 20° Fixed Beam



A base down axial profile delivering a “cool” beam of light in a range of fixed beams including 20°, 30°, 40° and 50°. The beam is of crisp “white” light with little or no distortion, ideal for pattern projection and precise beam shaping.

An energy efficient luminaire with active heat management system delivers longer life for filters, shutters and lower energy consumption.

Features

Produces more light than comparative traditional ellipsoidal profiles.

Cool ‘white’ light. Over 80% of the heat is removed from the light beam by the cold mirror and dissipated through the heat-sink.

Base down lamp mounted axially in the reflector to maximise light collection.

Choice of 600W, 800W, 1000W or 150W MH or MSR 575W lamp modules (each supplied with 1m mains cable).

Constructed from aluminium pressure die-castings and injection moulded Fortron plastic components

Accurate & easy to use lamp peak/ flat adjustment.

Two pattern/ iris mounting positions.

Automatic disconnection of power on removal of lamp module.

Height adjustable yoke.

Lamps: 240V

GKV600W	15,000 lumens	300 hours average life
GLB600W	13,000 lumens	1500 hours average life
800W	22,000 lumens	400 hours average life
GAD1000WBP	25,000 lumens	250 hours average life
GAB1000W BP 230V	25,000 lumens	250 hours average life

Order Codes

18PACFB/6
Pacific Fixed Beam body, no lens, 600W, 800W

18PACFB/1
Pacific Fixed Beam body, no lens, 1000W

18PACL20
Pacific 20° lens assembly

19PACGHA
Pacific gobo holder, ‘A’ size

19PACCF
Additional colour frame

19PACIRIS
Pacific iris

19PACSMFB
Pacific lens safety mesh

20HC
Suspension hook clamp


Approvals

CE marked.



Photometric Data

Tests conducted using standard 240V production lamps manufactured by Philips.

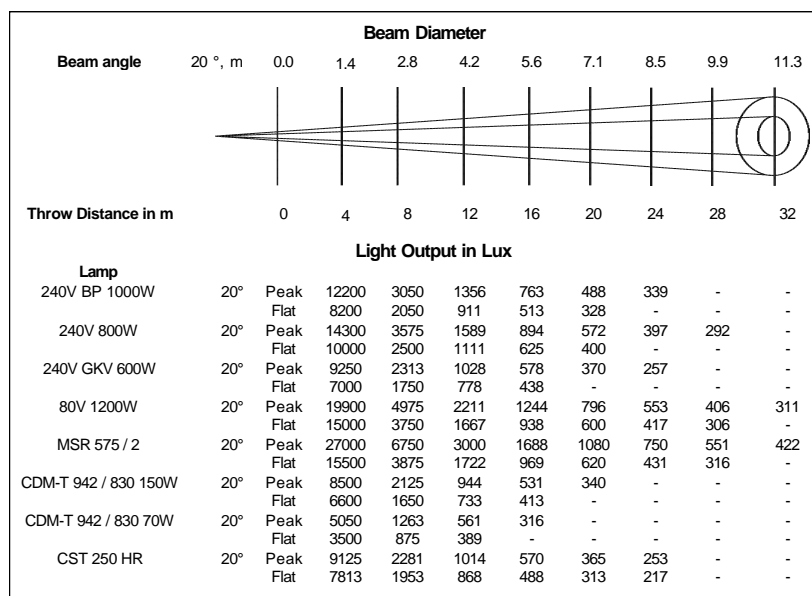

Physical Data


Weight: 8.1kg

Carton size: 650mm x 400mm x 260mm (estimated)

Colour frame size: 158mm square

Gobo size: A, 75mm diameter image

Included: 1 x colour frame, 1 x fitted safety bond, 1 x heat sink guard, 1 x M12 suspension bolt set and instruction leaflet.

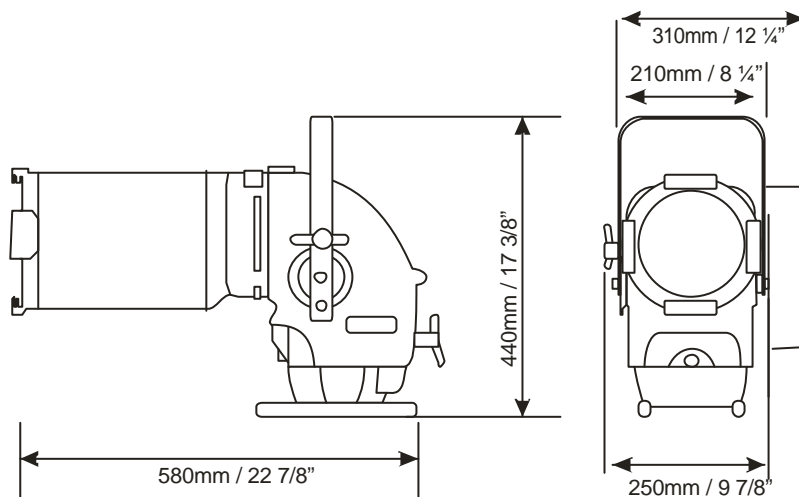

Selecon reserves the right to change the specifications without notice (07/08).